


TYPICAL CONSTRUCTION COMPOUND DETAIL
1:250

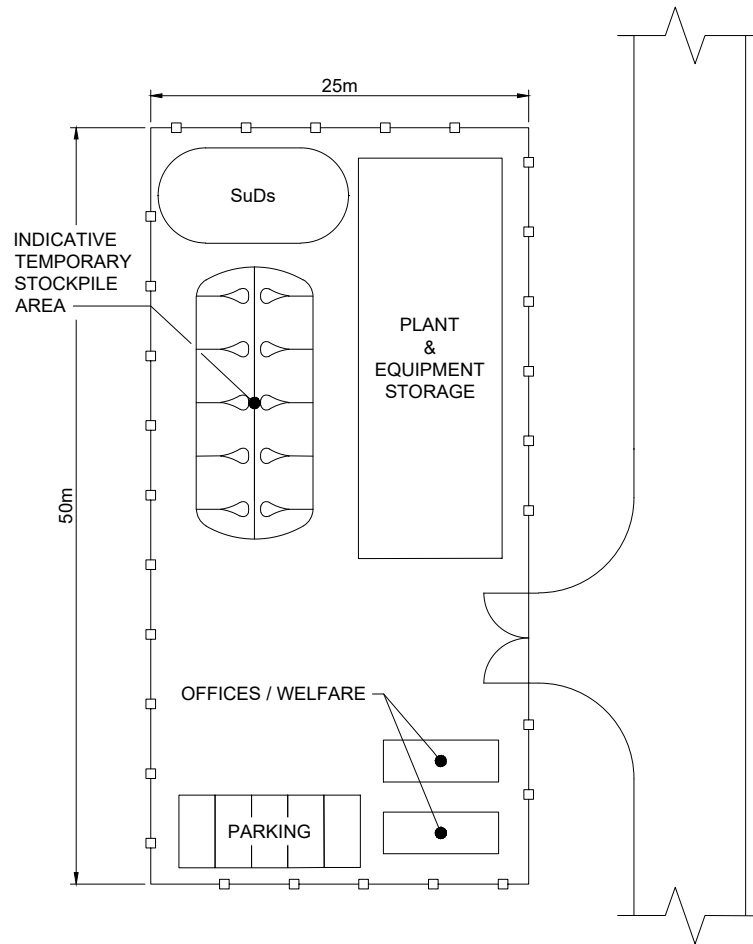


TYPICAL SATELLITE COMPOUND DETAIL
1:250

CONSTRUCTION COMPOUND DESIGN PRINCIPLES

1. PRIOR TO ANY ENABLING WORKS, NO TOPSOIL OR SUBSOIL STRIPPING SHOULD BE UNDERTAKEN WITHOUT THE WRITTEN PERMISSION OF THE HIGHLAND COUNCIL AND NATURESCOT (FORMERLY SCOTTISH NATURAL HERITAGE (SNH)). THIS SHOULD INCLUDE DETAILS OF ANY STORAGE OF MATERIALS AND LOCATIONS OF CONSTRUCTION ACCESS TRACKS.
2. ALL GROUNDWORKS, CLEARING LAND AND REPROFILING WILL TAKE INTO CONSIDERATION THE GUIDANCE CONTAINED WITHIN SCOTTISH ENVIRONMENT PROTECTION AGENCY'S (SEPA) SUPPORTING GUIDANCE (WAT-SG-75) SECTOR SPECIFIC GUIDANCE: CONSTRUCTION SITES (SEPT 2021).
3. BUNDS WILL BE USED WHERE REQUIRED TO MEET THE REQUIREMENTS OF SEPA'S POLLUTION PREVENTION GUIDELINES (PPGs) AND OIL STORAGE REGULATIONS;
 - 3.1. ALL FUEL SHALL BE STORED IN INTEGRAL BUNDED FUEL BOWSERS, DESIGNED TO HOLD AT LEAST 110% OF THE CONTENTS OF THE TANK. FUEL SHALL BE STORED AT LEAST 20m AWAY FROM ANY WATERCOURSE, WHERE PRACTICABLE.
 - 3.2. ALL OIL/LUBRICANTS SHALL BE STORED IN TEMPORARY IMPERMEABLE BUNDED AREAS OR SEALED BUNDED TANKS, DESIGNED TO HOLD AT LEAST 110% OF THE CONTENTS OF THE TANK. FUEL SHALL BE STORED AT LEAST 20m AWAY FROM ANY WATERCOURSE, WHERE PRACTICABLE.
4. ADEQUATE PARKING WILL BE PROVIDED TO ENSURE THAT THE SAFETY AND EFFICIENT OPERATION OF THE PUBLIC HIGHWAY IS NOT REDUCED.
5. WELFARE FACILITIES WILL BE PROVIDED TO MINIMISE THE NEED FOR OFFSITE TRIPS BY STAFF DURING THE WORKING DAY.
6. COMPOUND DESIGN AND LAYOUT WILL ENSURE THAT DUST EMISSION SOURCES ARE LOCATED AWAY FROM SENSITIVE RECEPTORS.
7. IF COMPOUND LIGHTING IS REQUIRED IT WILL BE DESIGNED TO MINIMISE LIGHT POLLUTION TO THE SURROUNDING AREA.
8. 50m BUFFER FROM ALL WATERCOURSES TO BE IMPLEMENTED AND ADHERED TO. WHERE THIS IS NOT POSSIBLE, ADDITIONAL MITIGATION TO AVOID POLLUTION OF WATERCOURSE WILL BE REQUIRED.
9. IF ON-SITE BATCHING FACILITIES ARE REQUIRED, THEY WILL BE OPERATED UNDER THE CONDITIONS OF THE APPROPRIATE AUTHORITY. WHERE POSSIBLE, BATCHING WILL BE CONDUCTED AT LEAST 50m FROM ANY WATERCOURSE WITH AN IMPERMEABLE HARSTANDING SUCH THAT SURFACE RUN OFF CAN BE INTERCEPTED FOR TREATMENT OR DISPOSAL OFF-SITE.

PROJECT
GLEN EARRACH
PUMPED STORAGE HYDRO

CLIENT

GLEN EARRACH ENERGY LTD.
50 LOTHIAN ROAD, FESTIVAL SQUARE
EDINBURGH, SCOTLAND, EH3 9WJ

CONSULTANT
AECOM
1 Tanfield
Edinburgh, EH3 5DA
+44 (0) 131 301 8600 tel
www.AECOM.com

- NOTES**
1. DRAWING IS FOR INDICATIVE PURPOSES ONLY.
 2. TEMPORARY CONSTRUCTION COMPOUND SHOWN INDICATIVELY WITH DESIGN PRINCIPALS SHOWN. FINAL DESIGN TO BE CONFIRMED BY CONTRACTOR.
 3. SuDS AREA SHOWN INDICATIVELY - TYPE AND SIZE ARE SUBJECT TO RUNOFF AND WILL BE DESIGNED BY CONTRACTOR AT THE DETAILED DESIGN STAGE.

Reproduced from Ordnance Survey digital map data © Crown copyright 2024. All rights reserved. Licence number 0100031673.



ISSUE PURPOSE
FINAL

PROJECT NUMBER
60719875

FIGURE TITLE
Indicative Construction Compound

FIGURE NUMBER
Figure 2.26